

PONTE 22 PENDANT

PRODUCT FEATURES

- Inspired by the Ponte Skyscraper in Johannesburg
- This item is made of natural brass. It is a living finish that will patina and warm with age which adds richness. If it gets an uneven patina or spots, a brass cleaner can restore the finish
- Five small light modules mounted from the base of a perfect ring
- Three sleek cables are held in place with a modern collar
- Includes 12 feet of field-cuttable satin cable
- Protected by a 5-year warranty. Please visit the "About Us" Page on techlighting.com for more for warranty details

LAMPING

Includes 16.1 watts, 841 total delivered lumens, 3000K LED modules. Dimmable with most LED compatible ELV and TRIAC dimmers. 277V dimmable with 0-10V. Ships with 12 feet of feild-cuttable matte black cable. 120V or 277V.



Nightshade Black



ORDERING INFORMATION

| 700TDPNT | LENGTH (A) | FINISH | LAMP |
|----------|------------|--------------------|--|
| | 22 22" | NB NATURAL BRASS | -LED930 INTEGRATED LED 90 CRI 3000K 120V |
| | | B NIGHTSHADE BLACK | -LED930-277 INTEGRATED LED 90 CRI 3000K 277V |

700TDPNT _____

JOB NAME _____


NOTES _____

PONTE 22 PENDANT



SPECIFICATIONS

| | |
|-------------------------------|-------------------|
| HARDWARE MATERIAL | Metal |
| SHADE MATERIAL | Aluminum or Brass |
| NET WEIGHT | 13 lbs |
| HEIGHT | 2.5in |
| WIDTH | 22in |
| LENGTH | 22in |
| UP LIGHT / DOWN LIGHT / BOTH? | |
| WET LISTED | |
| DAMP LISTED | Yes |
| DRY LISTED | |
| MIN. HANGING HEIGHT | 12in |
| MAX HANGING HEIGHT | 147.5in |
| TOTAL CORD LENGTH | 144in |
| TOTAL STEM LENGTH | |
| STEM QTY | |
| SLOPED CEILING ADAPTABLE? | Yes 45° Max |
| GENERAL LISTING | ETL Listed |
| INCLUDES | |

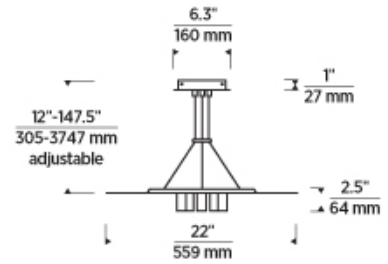

LAMPING SPECIFICATIONS

| | LED LAMP | INTEGRATED LED | NON LED | NO LAMP |
|-----------------------|----------|---------------------|---------|---------|
| DELIVERED LUMENS | | 841 | | |
| WATTS | | 16.1 | | |
| MAX WATTAGE PER BULB | | 16.1W | | |
| INPUT VOLTAGE | | 120V 277V | | |
| DIMMING TYPE* | | ELV, TRIAC 0-10V | | |
| CCT | | 3000K | | |
| CRI | | 90 CRI | | |
| LED LIFETIME | | | | |
| L70 | | >50000 | | |
| AVERAGE BULB HOURS | | | | |
| FIELD SERVICEABLE LED | | | | |
| LAMP BASE | | Integrated LED | | |
| LAMP SHAPE | | Integrated LED | | |
| LAMP INCLUDED? | | True | | |
| WARRANTY** | | 5 Years | | |

* Dimming information available at www.techlighting.com/Downloads#dimming

** Visit techlighting.com for specific warranty limitations and details.

T20 / T24 / JA8 INFORMATION

| | Integrated LED | Replacement LED Lamp | No Lamp * |
|--|----------------|----------------------|-----------|
| This product can be used to comply with California Building Energy Efficiency Standards 2016 Title 24 Part 6 / JA8. | Yes | | |
| This product can be used to comply with California Appliance Efficiency Standards 2016 Title 20 and may be shipped to and sold in California. | N/A | | |

* If a light fixture or component does not include a lamp or light source, it is the responsibility of the customer to select a lamp that meets the T24 and T20 requirements.



© 2019 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

7400 Linder Avenue, Skokie, IL 60077
T 847.410.4400 | F 847.410.4500 | techlighting.com