



CWS Cylinder Wall Sconce - Westport

FEATURES

- Provides comfortable diffused light

CERTIFICATIONS

- UL Listed for wet locations
- ENERGY STAR® Approved for superior energy efficiency

PERFORMANCE

- Rated lifetime L70 > 50,000 hours
- 3000K CCT
- CRI: >90; >80

ELECTRICAL

- Input voltage: 120-277VAC 50/60Hz
- Power Factor: >0.9
- THD: <20%
- 2kV surge protection

THERMAL

- -22°F to 122°F (-30°C to 50°C)

CONSTRUCTION

- Aluminum construction
- Black or bronze finish

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



3", 1 LIGHT



3", 2 LIGHTS



4", 2 LIGHTS



6", 1 LIGHT



6", 2 LIGHTS

APPLICATIONS

- Residential
- Hospitality
- Multi Family
- Retail

CONFIGURATOR

MODEL	ARRAY	LUMENS	WATTS	CRI/CCT	VOLTAGE	PHOTOCELL	FINISH
CWSW : Cylinder Wall Sconce - Westport	31 - 3"; 1 Light	75 - 750 lm	10W - 10W	930 - >90 CRI; 3000K	U - 120-277V	[Blank] - None	BK - Black BZ - Bronze
	32 - 3"; 2 Lights						
	42 - 4"; 2 Lights	150 - 1,500 lm	20W - 20W	830 - >80 CRI; 3000K		PH - Photocell	
	61 - 6"; 1 Light	162 - 1,620 lm	18W - 18W				
	62 - 6"; 2 Lights	324 - 3,240 lm	36W - 36W				




PERFORMANCE SUMMARY

ORDER CODE	ITEM #	ARRAY	WATTS	LUMENS	CCT	CRI	VOLTS	PHOTOCELL	FINISH	BEAM	ENERGY STAR®
11406	CWSWP31-75-10W-930-U-BK	3"; 1 Light	10W	750	3000K	>90	120-277V		Black	50°	★
11407	CWSWP31-75-10W-930-U-BZ	3"; 1 Light	10W	750	3000K	>90	120-277V		Bronze	50°	★
11410	CWSWP32-75-10W-930-U-BK	3"; 2 Lights	5W/5W*	375/375*	3000K	>90	120-277V		Black	50°	★
11411	CWSWP32-75-10W-930-U-BZ	3"; 2 Lights	5W/5W*	375/375*	3000K	>90	120-277V		Bronze	50°	★
11412	CWSWP42-150-20W-930-U-BK	4"; 2 Lights	10W/10W*	750/750*	3000K	>90	120-277V		Black	50°	★
11413	CWSWP42-150-20W-930-U-BZ	4"; 2 Lights	10W/10W*	750/750*	3000K	>90	120-277V		Bronze	50°	★
11408	CWSWP61-162-18W-830-U-PH-BK	6"; 1 Light	18W	1,620	3000K	>80	120-277V	✓	Black	80°	★
11409	CWSWP61-162-18W-830-U-PH-BZ	6"; 1 Light	18W	1,620	3000K	>80	120-277V	✓	Bronze	80°	★
11417	CWSWP62-324-36W-830-U-PH-BK	6"; 2 Lights	18W/18W*	1,620/1,620*	3000K	>80	120-277V	✓	Black	80°	★
11418	CWSWP62-324-36W-830-U-PH-BZ	6"; 2 Lights	18W/18W*	1,620/1,620*	3000K	>80	120-277V	✓	Bronze	80°	★

*Watt and Lumen values are per light; two values are shown for two-light arrays


PRODUCT DIMENSIONS

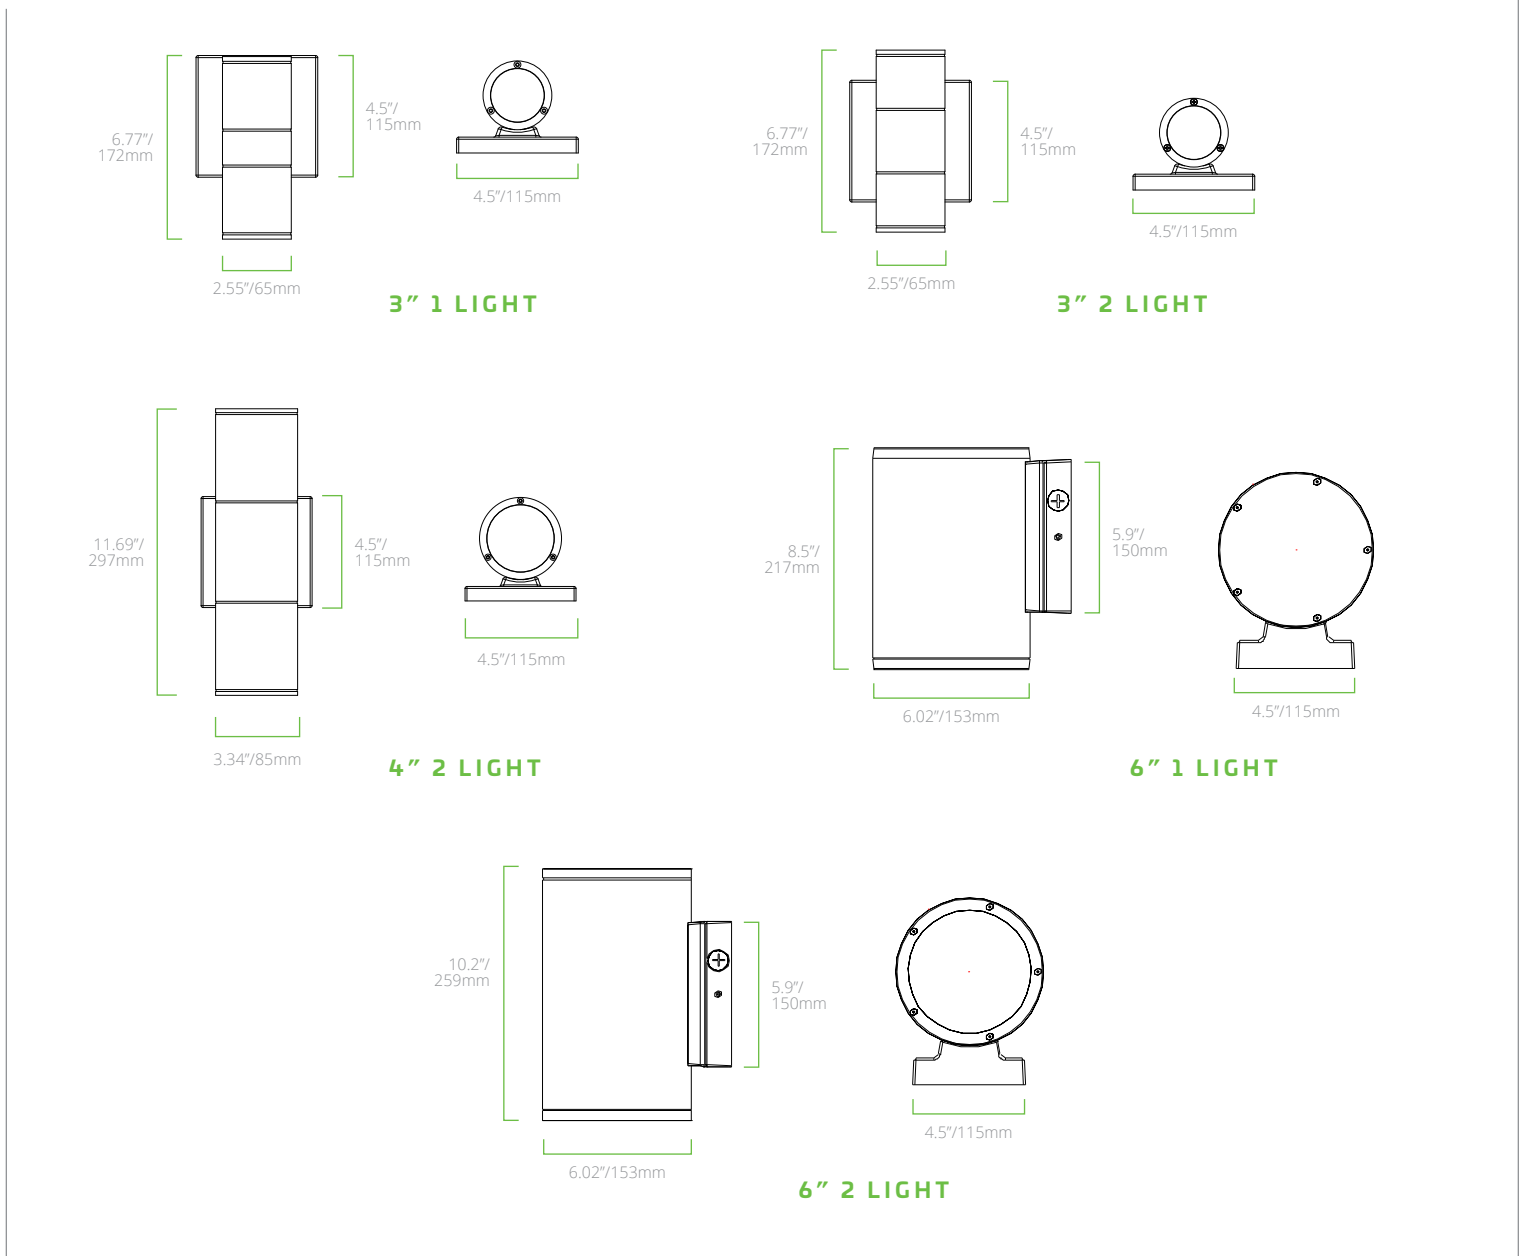

PHOTOMETRICS

CSMWP61-270-30W-830-U-DIM

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30		
0-40		
0-60		
0-80		
0-90		
60-80		
70-80		
80-90		
0-180		



PHOTOMETRICS

CSMWP61-270-30W-830-U-DIM

ZONAL LUMEN SUMMARY		
ZONE	LUMENS	%FIXTURE
0-30		
0-40		
0-60		
0-80		
0-90		
60-80		
70-80		
80-90		
0-180		

