| SPECIFICATION SHEET SUBJECT |   |
|-----------------------------|---|
| LED EMERGENCY LIGHT         | <b>Lighting</b>   |
| CUSTOMER PROJECT            |   |
| Project:                    |   |
| Type:                       | solutions closer to nature  |
| Cat. No.:                   | Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 88  |
|                             | DESCRIPTION   |
| Qty:                        |   |
| Date:                       | This remote emergency light head is constructed of high impact thermoplastic. Clear PC lens and aluminum reflector provide bright |



illumination. Adjustable swivel locks the lamp head position.



**CM SERIES REMOTE EMERGENCY LIGHT HEAD** (SINGLE)

# **SPECIFICATION FEATURES**

## Construction

EEL Rep:

Injection-moulded thermoplastic ABS housing. UL94V-0 flame rating. Clear PC lens and aluminum reflector provide bright illumination. Suitable for wall mounting and ceiling mounting. Standard canopy is designed to mount directly to typical electrical junction boxes

### Electrical

DC5V - DC12V Input Voltage. SMD 2W high power LED, CCT 6000K for emergency lamp heads. Ambient temperature 5°C to 30°C. Suitable for damp locations.


# **Finish**

White

CSA listed and meets all requirements in C22.2 No. 141-10

### Warranty

2 years

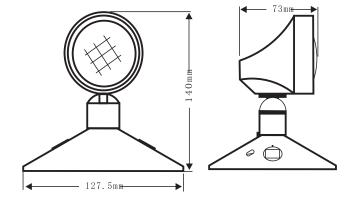

CM201A Dimensions mm | 127.5(Ø) x 140(H) inch | 5(Ø) x 5.5(H)








Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

## ORDERING CODE, ENERGY AND PERFORMANCE DATA

| Mode | l No. | Voltage (V) | Lamp Head | Lumen Output | Certification | Type     |
|------|-------|-------------|-----------|--------------|---------------|----------|
| CM20 | 01A   | DC5V-DC12V  | 2W        | 180 lm       | <b>®</b> ®    | Standard |

### **PHOTOMETRICS**

Luminous intensity distribution

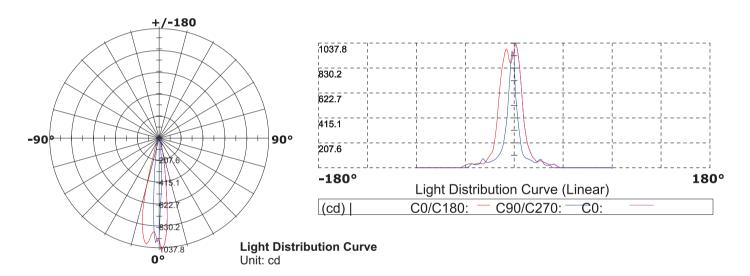

|        |           | <b>A</b> |          |
|--------|-----------|----------|----------|
| Height | Center Ix |          | Diameter |
| 1.m    | 935.02 lx |          | 39.42cm  |
| 2.m    | 233.76 lx | <u> </u> | 78.84cm  |
| 3.m    | 103.89 lx |          | 118.26cm |
| 4.m    | 58.44 lx  |          | 157.68cm |
| 5.m    | 37.40 lx  |          | 197.10cm |
| 6.m    | 25.97 lx  |          | 236.52cm |
| 7.m    | 19.08 lx  |          | 275.94cm |
| 8.m    | 14.61 lx  |          | 315.36cm |
| 9.m    | 11.54 lx  |          | 354.78cm |
| 10.m   | 9.35 lx   |          | 394.20cm |
| 11.m   | 7.73 lx   |          | 433.62cm |
| 12.m   | 6.49 lx   |          | 473.04cm |
| 13.m   | 5.53 lx   |          | 512.46cm |
| 14.m   | 4.77 Ix   |          | 551.88cm |
| 15.m   | 4.16 lx   |          | 591.30cm |
| 16.m   | 3.65 lx   |          | 630.72cm |

Lux Distance Curve
Beam angle: 22.30° (50% lmax)

