


SPECIFICATION SHEET

4 3/8" PAR30 SERIES

CA2575

WHITE PAINTED REMODEL HOUSING
(NO TRIM REQUIRED)

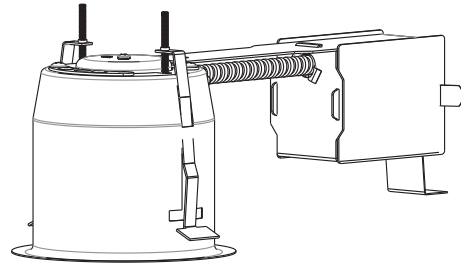

YES

Damp Location



PAR30 75W MAX

PAR



Voltage

120 VOLTS (CAN & USA.)



Thermal Protector

T°C 100°C No 027



OD Cut

4 5/8" (117mm)





E174023



Dimensions

Overall Dimensions :
Length : 13 1/8" (333mm)
Width : 5 1/2" (140mm)
Height : 6" (152mm)

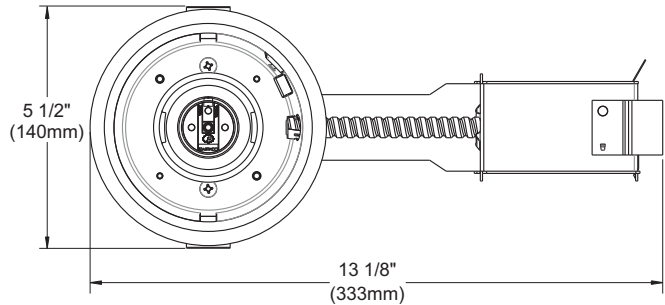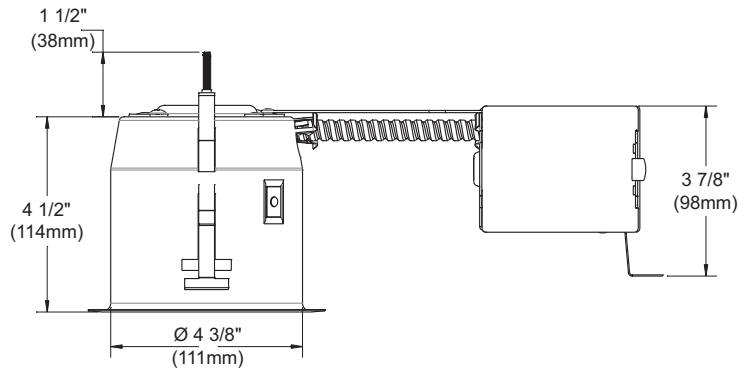

COMPATIBLE TRIMS AND ACCESSORIES

75W PAR30

BAFRE2575
C2575
REFRE2575

*The C2575 collar requires a BAFRE2575 baffle or a REFRE2575 reflector to be secured.

TECHNICAL SPECIFICATIONS

0,051" (1,3mm) thickness Galvanized Steel.
Below-ceiling accessible.
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
Takes up to 7/8" thick ceiling.
Perfect fit into ceiling.
No light leak.



Your representative : _____

Your project : _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN, G6Z1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

NOVEMBER 2010