

# Airin Wall (LED)

WS898\_LED 1.0



## GENERAL PRODUCT INFORMATION:


These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for damp locations.


This product may be dimmed using a low voltage electronic dimmer.

This instruction shows a typical installation.

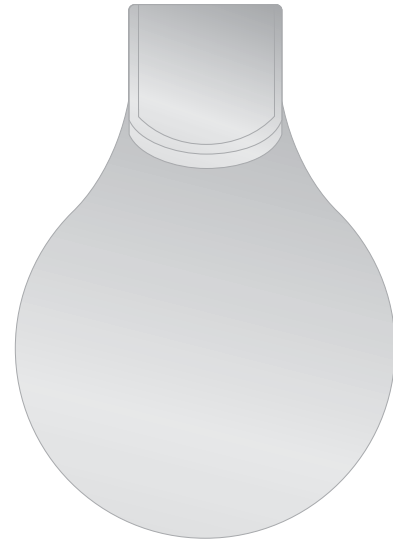


**CAUTION - RISK OF FIRE**  
 This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.  
 Use minimum 90°C supply conductors.


## Install the Fixture

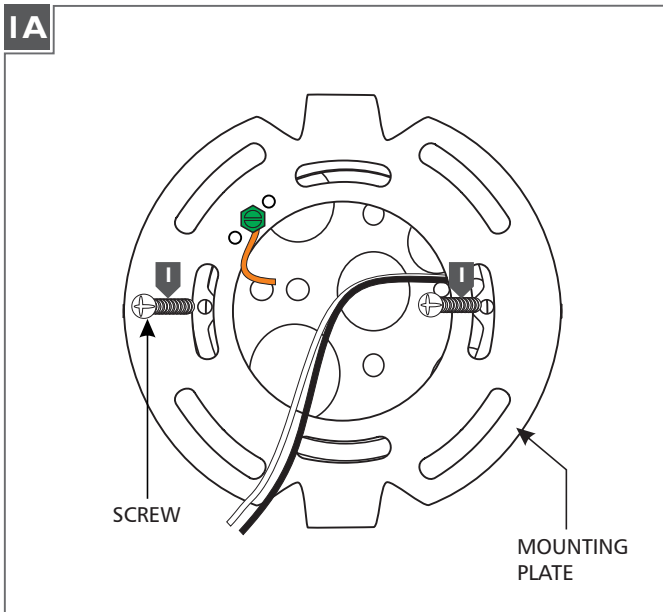


**1** Attach the mounting plate to the electrical box using the two #8-32 screws provided.

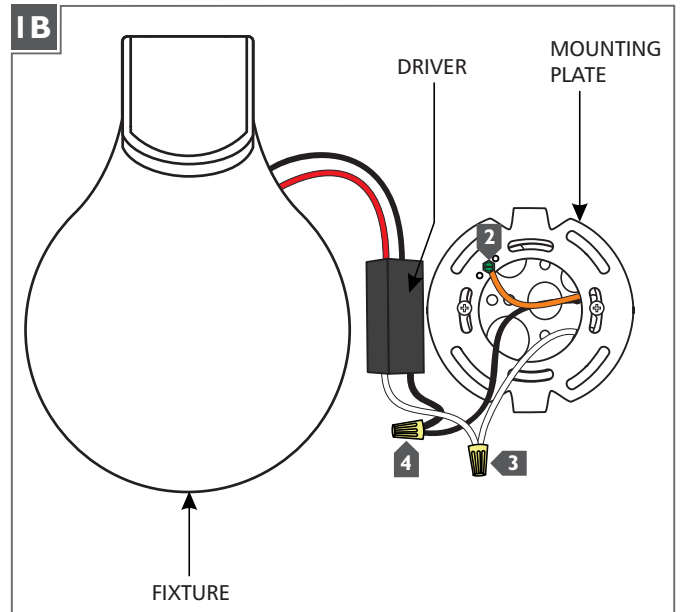

- 2** Connect the mounting plate ground wire to a suitable ground in accordance with local electrical codes.
- 3** Connect the white driver wire to the neutral power line wire with a wire nut.
- 4** Connect the black driver wire to the hot power line wire with a wire nut.

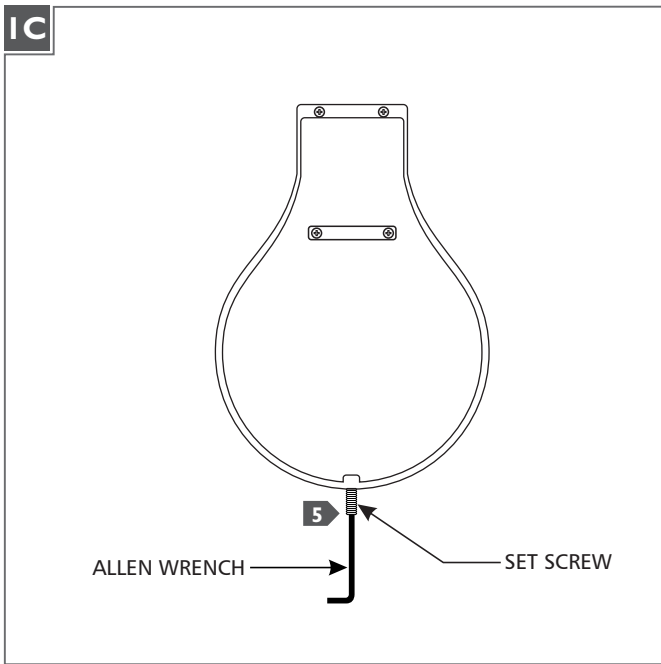**IC**

- 5** With the Allen wrench provided, back out (do not fully remove) the set screw at the base of the fixture.

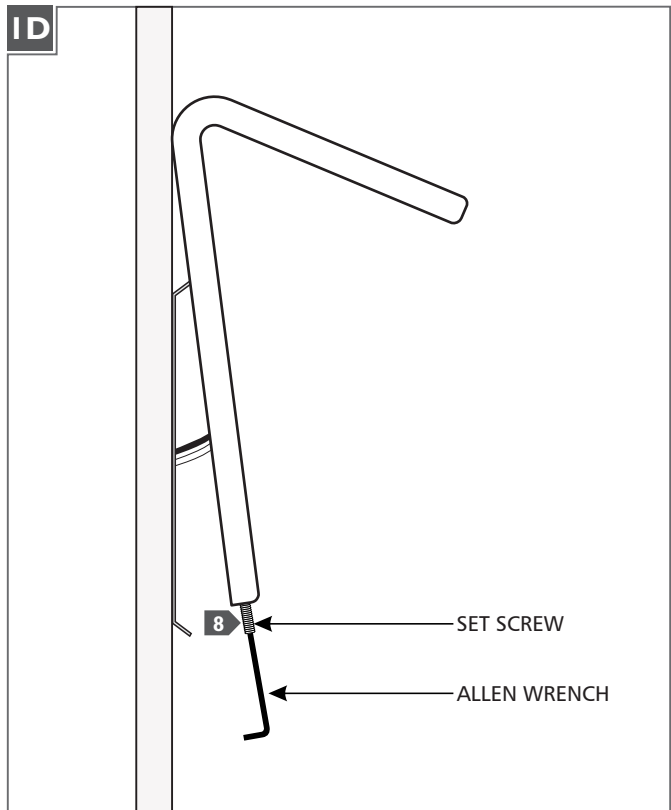**ID**

- 6** Properly place the driver, all wires, and wire nut connections into the electrical box.
- 7** Hook the top of the fixture to the top of the mounting plate and swing the bottom of the fixture toward the plate until it is flush with the wall.
- 8** Tighten the set screw at the bottom of the fixture.

**SAVE THESE INSTRUCTIONS!**

**LBL**

7400 Linder Ave, Skokie, IL 60077

800.323.3226 - 847.626.6300

[www.lblighting.com](http://www.lblighting.com)

© 2016 LBL Lighting. All rights reserved. The "LBL Lighting" graphic is a registered trademark of LBL Lighting. LBL Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company