Ash Outdoor Pendant



GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.



This product is suitable for wet locations.


This instruction shows a typical installation.




CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

Use minimum 90°c supply conductors.

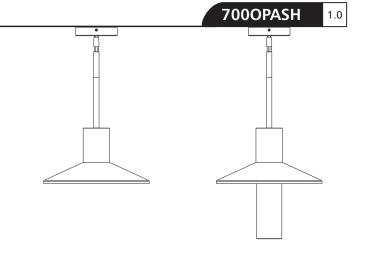

Install the Fixture

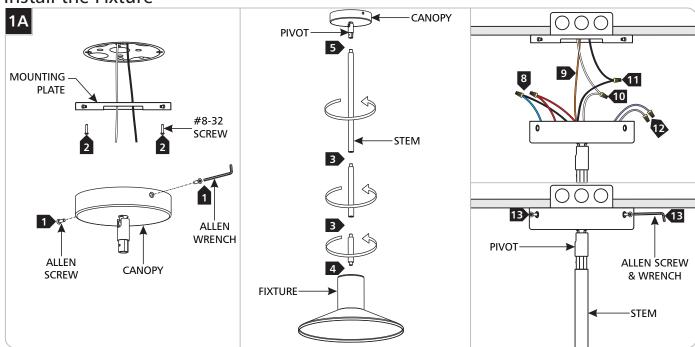

- Remove the mounting plate from the canopy by unscrewing the Allen screws around the canopy using the provided Allen wrench.
- Attach the mounting plate to the junction box using the two provided #8-32 screws.
- Determine desired length of fixture using the provided stems and assemble them by screwing them together.
- Feed the fixture wires through the stem assembly and screw it to the fixture.
- Feed the fixture wires through the pivot and screw it onto the stem assembly.
- Leave 6" of the cord behind the canopy for power connections. Cut the excess cord.
- Strip the ends of the wires.
- Connect the red fixture wire to the red driver wire and connect the black fixture wire to the blue driver wire.
- Connect the fixture to a suitable ground in accordance with local electrical codes.
- Connect the white fixture wire to the neutral power line.
- Connect the black fixture wire to the hot power line.
- Use the gray and purple dimming wires for 0-10v dimming application (if not in use, make sure to cap these wires off). Warning: The purple and gray wires are only used for 0-10v dimming. For all other applications, do not connect the gray and purple wires.
- Properly place all wires and wire nut connections into the canopy, install the canopy to the mounting plate, and reinstall the Allen screws (reversal of step 1).
- For wet locations, fill cavity on the side of the pivot with silicone.

SAVE THESE INSTRUCTIONS!



7400 Linder Ave, Skokie, IL 60077 847.410.4400

www.techlighting.com

© 2018 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark of Tech Lighting, L.L.C. Tech Lighting reserves the right to change specifications for product improvements without notification.

A Generation Brands Company